
* duygu17.dh@gmail.com




Figure 3: Simulation of ions withdrawn from plasma using a two-electrode system (with IBSIMU).

a two-electrode system you can see Fig. 3. [5] The beam profiles and phase space of the data were demonstrated as in Fig. 4) and the normalized emittance with Twiss parameters are given in Table 1.

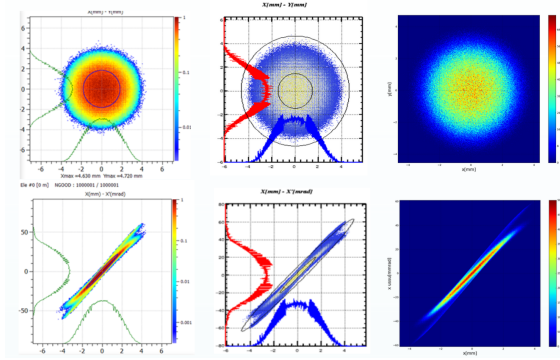


Figure 4: Beam profile and phase space simulation graphics at the entrance to the LEBT line. [6]

Table 1: Emittance and Twiss parameter values.

	PlotWin	DemirciPro	Python
ϵ_{norm} (π mm.mrad)	0.0299	0.0297	0.0298
α	-6.41	-6.41	-6.41
β (mm / π .mrad)	0.47	0.47	0.47

PEPPERPOT EMITTANCE MEASUREMENT

The main components of the Pepper Pot are the pinhole mask, a phosphorus screen, a plane mirror, and a camera attached to the glass window. The pinhole mask is made of a 250 μ m thick stainless-steel by UFOLab at Bilkent Univ. Pinholes with a diameter of 100 μ m are spaced 2 mm horizontally and vertically and cover an area of 50 \times 50 mm.

To prevent thermal deformation of the pinhole mask, it is sandwiched between two frames of 500 μ m thick aluminium. The phosphor screen was made in the laboratory on 300 μ m thick glass with 60 \times 60 mm dimensions using fluorescent powder. The mirror was mounted at the behind of the phosphor screen with a 45° angle. The image reflected from the mirror through the glass window was taken by the camera [7].

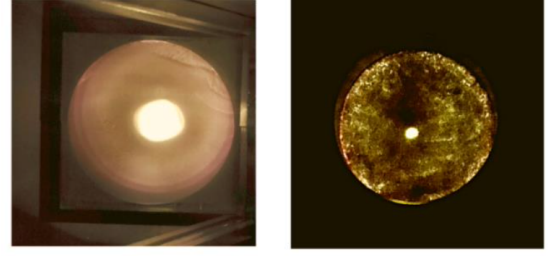


Figure 5: Beam spot in diagnostics station (left) and after Sol-2 (right).

PROFILE & EMITTANCE MEASUREMENT

The real images of the beam spots as shown in Fig. 5 were taken from the inside of the MBOX and the exit of the LEBT line, respectively. The diameter of the beam spot was calculated with the method of finding the FWHM and the results are shown in Fig. 6. The simulation and measurement results are given in Table 2.

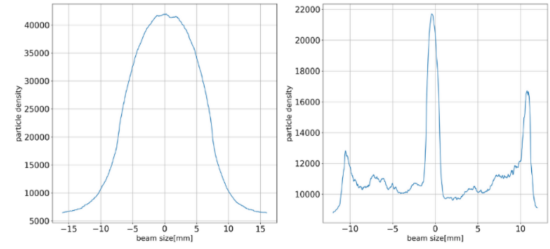


Figure 6: The analysed graphs for the real beam spot.

Table 2: Comparison of the simulated data Emittance and Twiss parameter values.

	Simulation	Measurement
ϵ_{norm} (π mm.mrad)	0.031	0.0297
α	-4.5	-18.9
β (mm / π .mrad)	1.33	2.13
BeamSizeinbox	14.8 mm	15 mm
BeamSize after sol-2	2 mm	2 mm

IMAGE PROCESSING FOR EMITTANCE MEASUREMENTS

An image processing analysing program was developed in-house. The process for a pepper pot measurement was done in 3-stages(as shown in Table 3). The first stage was to take two density profiles in x and y-directions from the image as shown in Fig. 7. As the center locations of holes on the plate were mechanically fixed, the mean positions of the peaks at the profiles were assumed as the gaps' centers on the plate. The following step was to reconstruct transversal phase spaces and to calculate emittance and twiss parameters

with the help of these position information. The last stage was the comparison of the computed essential parameters from the image and simulated data. can be seen in Fig. 8.

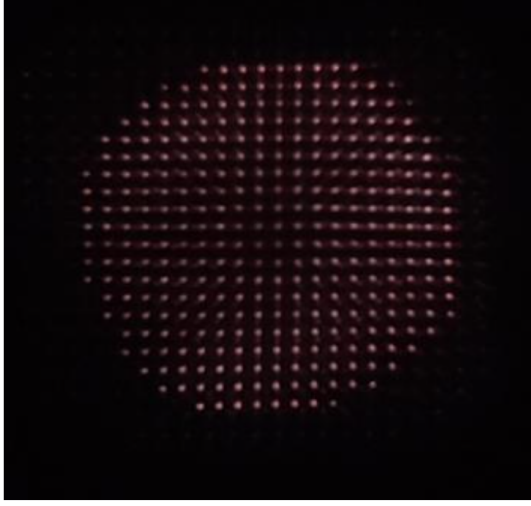


Figure 7: Beam image after the pepperpot plate.

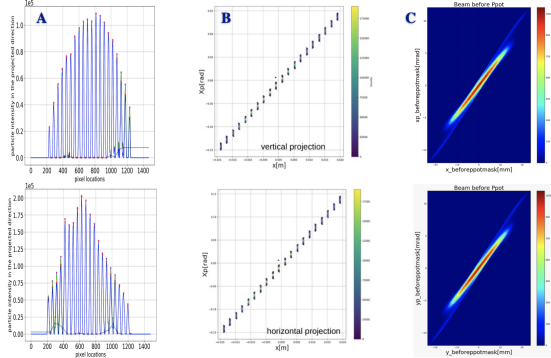


Figure 8: Image processing for the pepper pot measurement. The column with label A is the plots of density profiles in X and Y directions. The mid column with label B shows the re-constructed phase spaces in transverse directions. The graphs at the right, label C, are the simulated transversal phase spaces.

Table 3: Comparison of simulation and image analysis.

	Simulation X - Y		Measurement X - Y	
ϵ_{norm} (π mm.mrad)	0.029	-0.033	0.029	0.030
α	-18.9	-13.54	-6.38	-6.37
β (mm / π .mrad)	2.13	1.83	1.34	1.33

CHARGE MEASUREMENT

The outer cover of the Faraday container used for beam current measurement is made of Teflon material to provide

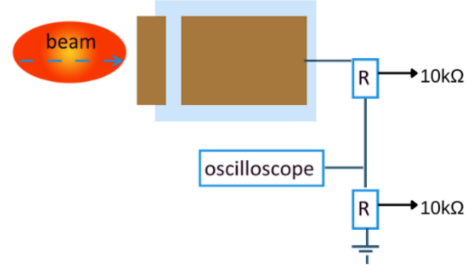


Figure 9: The schematic of the charge measurement.

insulation, and the inner part is made of copper. An oscilloscope is used for signal monitoring, and a voltage divider circuit is used to protect the oscilloscope device while measuring (Fig. 9). Figure 10 shows that each pulse width is 8 ms and the pulse duration is 20 ms in the image taken from the oscilloscope. Therefore, the duty factor can be calculated as d.f. = $8/20 = 0.4$. Similarly, the instantaneous current was 0.03 mA and the average current was 0.012 mA.

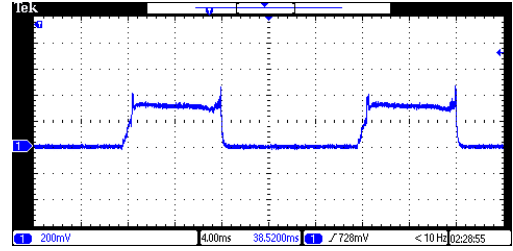


Figure 10: FC signals on the oscilloscope screen

RESULT AND OUTLOOK

Simulations and measurements were performed for the 20 keV proton beam. The beam profile and charge measurements from the LEBT line are consistent with their simulations. The Pepper Pot emittance calculation software results were compatible with DemirciPRO predictions. The beam profile measurements were taken with the handmade phosphor screens. LEBT line measurements showed that the beam could match the RFQ [8] with the specified configurations. The RFQ [9] is being manufactured for beam tests in late 2023.

REFERENCES

- [1] Adiguzel, A., et al., “Ion source and LEBT of KAHVELab proton beamline”, arXiv 2208.00529, 2022.
- [2] Cakir, O., Celebi, E., Cetinkaya, H., Kolenoglu, H., Turemen, G., et al., “DemirciPro’s tools for completing the Linac: Ion source and LEBT line”, arXiv:2103.11829[physics.acc-ph].
- [3] Python Software Foundation, “Python Language Reference”, version 3.8
- [4] Adiguzel, A., et al., “Low-energy Proton Beam Diagnostics: An Integrated Solution”, In preparation, 2022.

- [5] T. Kalvas, et. al., “IBSIMU: A three-dimensional simulation software for charged particle optics”, Rev. Sci. Instrum. 81, 02B703, 2010.
- [6] D. Uriot “Plotwin v4.0 User Manual”, CEA Saclay, 2017
- [7] Yildiz, H., et al., “Compact measurement station for low energy”, doi:10.1016/j.nima.2018.07.054
- [8] Esen, S., et al., “Compact proton accelerator in UHF-band at KAHVELab”, presented at LINAC’22, Liverpool, United Kingdom, Sep 2022, paper TUPOPA11
- [9] Kilicgedik, A., et al., “Rf measurements and tuning of the test module of 800 Mhz radio-frequency quadrupole”, presented at LINAC’22, Liverpool, United Kingdom, Sep 2022, paper TUPOPA12